


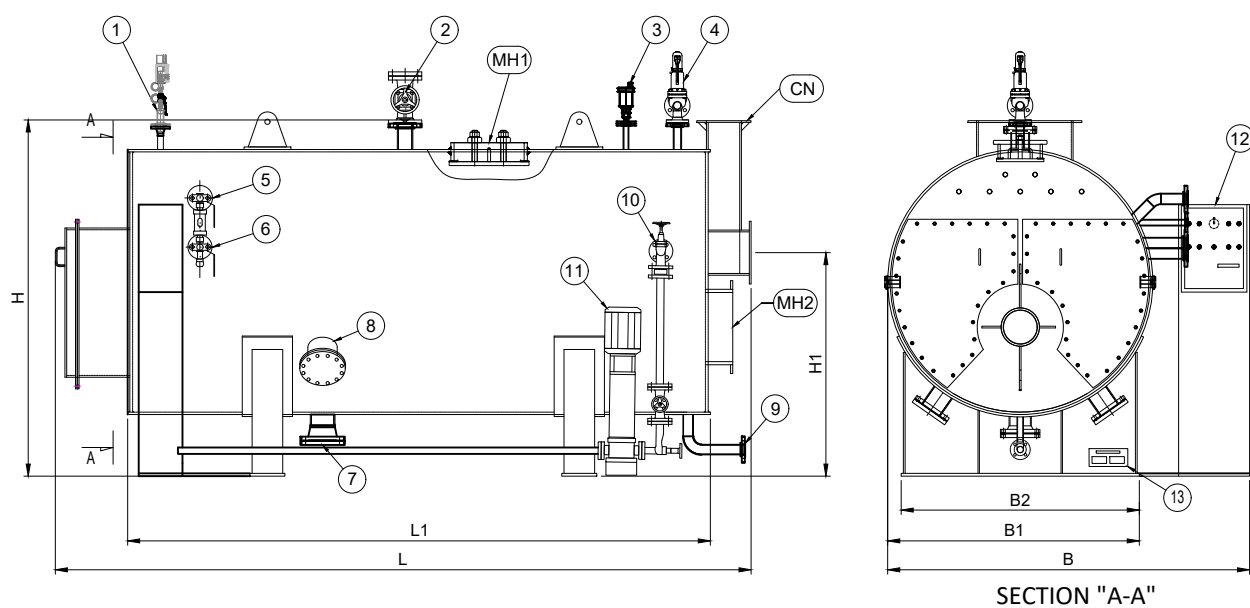

- 1- Pressure transmitter
- 2- Steam outlet
- 3- Air vent
- 4- Safety valve
- 5- Side indicator nozzle 1
- 6- Side indicator nozzle 2
- 7- Drain

- 8- Cleaning nozzle
- 9- Blowdown pipe
- 10- Water Inlet nozzle
- 11- Feeding pump
- 12- Electrical panel
- 13- Name plate

- MH-1- Manhole
- MH-2- Manhole
- CN- Smoke outlet flange

MODEL TYPE	SBC-FT	500	1000	2000	3000	4000	5000	6000
Max power output	kW*	363.9	727.8	1455.4	2183.4	2911.1	3638.9	4366.7
Steam production	kg/h	500	1000	2000	3000	4000	5000	5000
Efficiency	%	90%	90%	90%	90%	90%	90%	90%
Dimensions	B mm	1911	2065	2334	2403	2471	2630	2565
	B1 mm	1436	1436	1704	1773	1841	2000	1935
	B2 mm	1359	1359	1686	1686	1686	1900	1686
Dimensions	L mm	2591	3970	4293	5610	5834	6535	6659
Dimensions	L1 mm	1750	3325	3600	4524	4749	5449	5574
Dimensions	H mm	1916	2048	2326	2428	2577	2682	2766
	H1 mm	1178	1274	1579	1690	1795	1885	1889
Connections	CN mm	400 X 650	300 X 700	300 X 720	300 X 720	300 X 720	300 X 720	300 X 720
Connections	Steam DN	80	80	80	80	80	80	80
Connections	Discharge DN	25	25	25	25	25	25	25
Empty weight	kg	3198	6790	7302	6394	7302	14650	14850

* Kw is based on 10 bar design pressure @ 100°C water inlet temperature.